


Description

HCS BPIM Series, BPIM rPDU, 24 IEX, 32A, Single Phase, Vertical Mounting

Qualifications and Approvals

- ✓ IEC 62368-1 (3rd Edition)
- ✓ RoHS
- ✓ CE

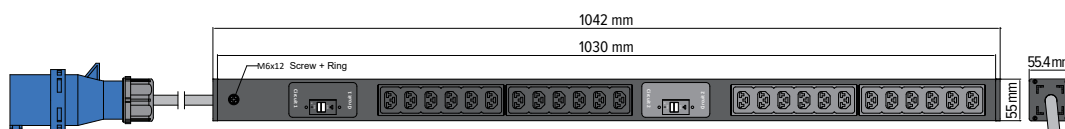

INPUT & OUTPUT PROPERTIES

Plug	IEC 60309 1P+N+E 6h 32A 250V single phase
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	190-250V single phase
Frequency	50-60Hz
Power Capacity	7360W
Rated Output Voltage	190-250V single phase
Output Types	24 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Carling 16A L Series L31-B0-24-616-H12-D3

PHYSICAL AND MECHANICAL PROPERTIES

Dimensions (H x W x D)	1042 x 55 x 55.4 mm
Housing	Aluminium
Colors	Default RAL 9004 black powder coat (different colors are available)
Mounting Options	4 mounting options
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf·cm or 22.4 in·lbs)
Temperature Range	0° to 60° C
Humidity	0 - 95 %
Elevation	0 - 4000 Meters

ORDERING INFORMATION

HCS P/N	Description
XBBPIM55-2432A1P-VBK	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Black Chassis rPDU
XBBPIM55-2432A1P-VRD	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Red Chassis rPDU
XBBPIM55-2432A1P-VBL	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Blue Chassis rPDU
XBBPIM55-2432A1P-VGR	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Green Chassis rPDU
XBBPIM55-2432A1P-VGY	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Gray Chassis rPDU
XBBPIM55-2432A1P-VWH	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, White Chassis rPDU
XBBPIM55-2432A1P-VYL	HCS BPIM, 24 IEX, 32A, Single Phase, Vertical Mounting, Yellow Chassis rPDU