

#### Description

HCS HCS DataLine series includes a Wide range of high quality racks, cabinets and enclosures, specially designed for structured premise cabling in local area networks (LANs), including distribution and equipment, cross connect cabinets and racks, splice boxes, climate control and many more components for both copper and 'fiber optic cabling systems.

HCS DataLine 21 SOHO 10" Wall Mount Cabinets are suitable mainly for office environments & equipment rooms, having an attractive design combined with a long-lasting, solid & stable construction, guaranteed by the HCS DataLine Logo & Trademark.

#### Applications

The special design of HCS DataLine 21 SOHO 10" Wall Mount Cabinets allows the use of a large variety and types of accessories, including 19" panels, hubs and active equipment, fixed and/or sliding shelves, fan units, power strips, pulleys, grounding and potential equalization bus bars, lighting units, stacking kits, floor fixing kits, cable management panels, and many other 19" devices and accessories.

### **Qualifications and Approvals**

HCS DataLine 21 SOHO 10" Wall Mount Cabinets are supported by HCS DoubleSafeTM QA Program and they comply to the following standards:

General	Steel Sheets	Powder Coating		Mechanical		Assembly		IT equipment safety		Fan Unit & Power Strips	
TS EN 50297-3-100/101/102	DIN EN 10130-91	0	DIN 67530	0	TS EN 61587-1	0	TS EN 60917-2-1/-2	0	TS EN 60950-1	0	TS EN 60439-1
DIN 41494	DIN EN 10327	0	ASTM D 2796					0	IEC 60364-7-707	0	TS EN 62208
TS EN 60529-1	■ EREĞLİ 6112	0	ASTM D 3451								
IP20 (Optional IP 42)											




### **Benefits & Features**

- Solid and stable construction- providing support for large loads.
- **a** Aesthetic & attractive design for use in open office environments.
- Flat packed design option- providing minimal storage space and saving transportation costs.
- Large cable spaces enabling easy and comfortable installation of many cables.
- Sophisticated cable channeling enabling concealed cords routing.
- Clear u-marking inside the cabinets enabling easy & simple profile installation planning.
- Vented top cover- allows passive ventilation.
- PVC stoppers avoid metal surface noice while side panels are mounted.

33



General Properties	
Material of Construction	Sheet & Galvanized steel. 1.0/1.2/1.5 mm thickness.
Paint and Color	Special steel finish with electrostatic powder coat, RAL 7035 grey. Other colors available upon request.
Front Door	Smoked, secured and tempered glass, 4 mm. thickness. Interchangable (Left&right). 150 degree opening for single use.
Side Panels	Complete metal, screwed to top and bottom chasis.
Rear Panel	Complete metal. Mounting plate supported with C form bending. 37x110 mm cable entry hole (plate or brush mountable).
Top Chasis	Monoblock, Fx form construction. Fan tray mountable. 37x110 mm cable entry hole (plate or brush mountable).
Bottom Chasis	Monoblock, Fx form construction. 37x110 mm cable entry hole (brush mountable)
10" profiles	2 units in the front. U-marked.
Vertical Cable Organizer	None.
Front Door Lock	High quality, single point cylindrical locking mechanizm.
Loading Capacity	20 kg max.

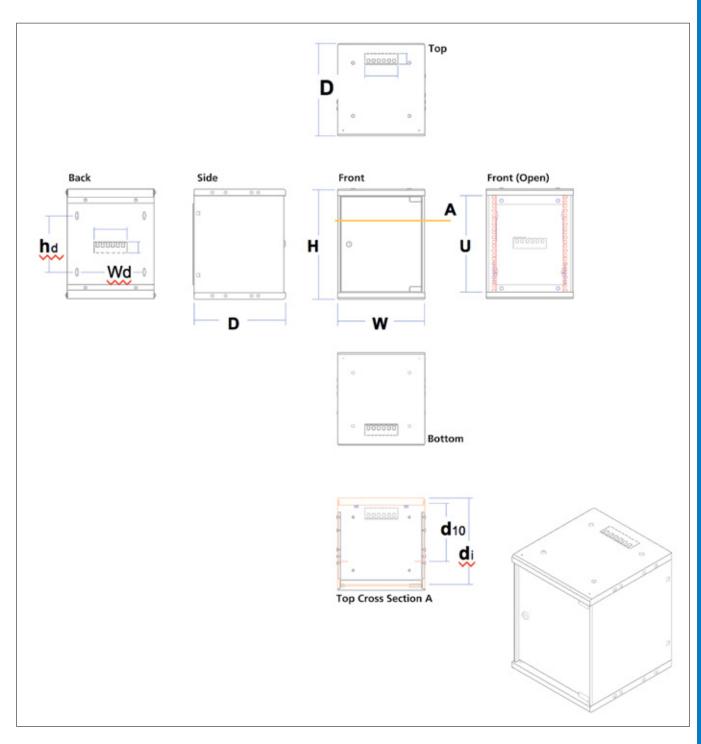

	Ordering Information									
	HCS P/N		Internal Height mm		Dimensio	Nat Walaht				
		Description		Width mm	Depth mm	Height mm	Net Weight Kg	Notes		
ı	C21-00733	7U 10" SOHO Wall Mount Cabinet	360	285	300	365	10			