

Description

HCS DataLink 100E German Style face plates series includes high quality, state-of-the-art faceplates for perfect and professional installations, needed to provide fully compliant copper cabling systems.

All jacks fully conform to ANSI/TIA/568-C.2 Category 5E, CENELEC EN 50173 and ISO/IEC-11801 (2nd Edition) requirements.


The HCS Logo and the DataLink 100E Trademark ensure long lasting high-performance and full support of all relevant applications, including 1000BASE-T (Gigabit-Ethernet).

Proper use of HCS DataLink 100E Face Plates and Outlets, along with all HCS cabling components provide high-quality cabling systems which are supported by the Century™ Lifetime Warranty and the DoubleSafe™ QA program as a part of complete HCS cabling system.

Applications

HCS DataLink 100E German Style face plates series fully support all relevant LAN applications, including the following protocols:

- ☑ 1000BASE-T Gigabit Ethernet
- ☑ ATM 155
- ☑ TP-PMD
- ☑ 100BASE-T Fast Ethernet
- ☑ 100BASE-T2
- ☑ 100BASE-T4
- ☑ 100BASE-TX
- ☑ Token Ring 100 Mbps
- ☑ ATM 52
- ☑ ATM 25
- ☑ 10BASE-T Ethernet
- ☑ Token Ring 4 Mbps and 16 Mbps
- ☑ Broadband and Baseband Video
- ☑ ISDN Basic and Primary Access
- ☑ 1BASE-5 Starlan
- ☑ ISALAN
- ☑ ITU V.21 and X.11

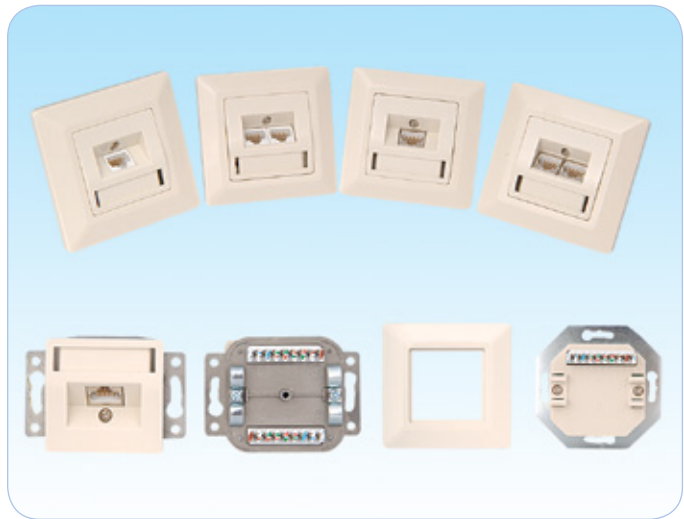

Qualifications and Approvals

HCS DataLink 100E German Style face plates series are supported by the Century™ Lifetime Warranty and by the DoubleSafe™ QA program as a part of complete HCS cabling system.

HCS DataLink 100E German Style face plates series comply to IEC 60603 and to the following standards:

TRANSMISSION

- ☑ ANSI/TIA/568-C.2
- ☑ ISO/IEC-11801

EMC

- ☑ EN-55022, Class B (Europe)
- ☑ FCC Part 68

SAFETY

- ☑ UL94 V-0 rated plastic materials
- ☑ Zero-halogen in LSOH constructions.

Benefits & Features

- ➔ Exceptional material properties and design - Providing a unique Century™ Lifetime Warranty.
- ➔ Angled design - Providing easier access, better and faster wire connection.
- ➔ Detailed installation manual in English and Turkish - Providing clear and comprehensive instructions.
- ➔ Exceeding Category 5E performance - Providing full support to Gigabit Ethernet.
- ➔ Robust and installer-friendly design - Providing reduced installation and operating costs
- ➔ Compatible with 22-26 AWG solid or stranded conductors - Providing support to a wider range of cabling types.
- ➔ Available in T568A, T568B or Universal pin/pair assignment - Providing a wider product range.
- ➔ Unique DoubleSafe™ Quality Assurance Program - Providing lowest rejection rate available.

GENERAL PROPERTIES

Housing Material	High impact, Flame-retardant plastic compound, UL 94 V-0.
Jack Contacts Material	50 micro-inches gold plating over 100 micro-inches nickel plated copper alloy.
Environmental Conditions	-40 to +60C at 0-90% RH (Non condensing)
Packaging	50 or 100 Units per box.
Plug Retention Force	14 Kgf (140N) min.
Plug to Jack Contact Force	100 gr. min. (using HCS approved plug).
Storage Temperature	-20 to +80C
Plug Insertion Durability	750 mating cycles
Conductor Compatibility Range	22 to 26 AWG, solid or stranded
Standard Color	White RAL 1013. Other colors available upon request.