



Description

HCS DataLight fiber optic terminal boxes are suitable for optical fiber splitting and splicing designed for ease of installation with excellent cable management. HCS DataLight fiber optic terminal boxes are supported by the Century™ Lifetime Warranty and by the DoubleSafe™ QA program as a part of the complete HES Cabling System.

Applications

- FTTH access Network
- Telecommunication Networks
- CATV Networks
- Data communications Networks

Qualifications and Approvals

HCS DataLight fiber optic terminal boxes are supported by the Century™ Lifetime Warranty and by the DoubleSafe™ QA program as a part of complete HES Cabling System.


Benefits & Features

- Industry Standard User Interface, made of ABS , having IP65 level.
- Can accommodate 1x4,1x8,1X16, 2x4,2x8 or 2x16 PLC splitters.
- Can accommodate 24pcs LC, FC, ST or SC adapters.
- Rain resistant, suitable for outdoor use.
- Designed for both wall mounting and pole mounting.
- 2 inlet ports suitable for 6-12 mm cable OD;
- 24 outlet ports suitable for 2-3 mm FTTH cable.
- Exceptional material properties and design - Providing a unique Century™ Lifetime Warranty.
- Detailed installation manual in English and Turkish - Providing clear and comprehensive instructions.
- Robust and installer-friendly design - Providing reduced installation and operating costs.
- Unique DoubleSafe™ Quality Assurance Program - Providing lowest rejection rate available.


ORDERING INFORMATION

HCS P/N	Description	Max. Fiber Capacity	Dimension (mm)	Alternative Configurations
VFO-60216	DataLight Fiber Optic Terminal Box	24	274.3x313.4x114.1	1. 2 splitters 2. 24 adapters

OPERATION DRAWING

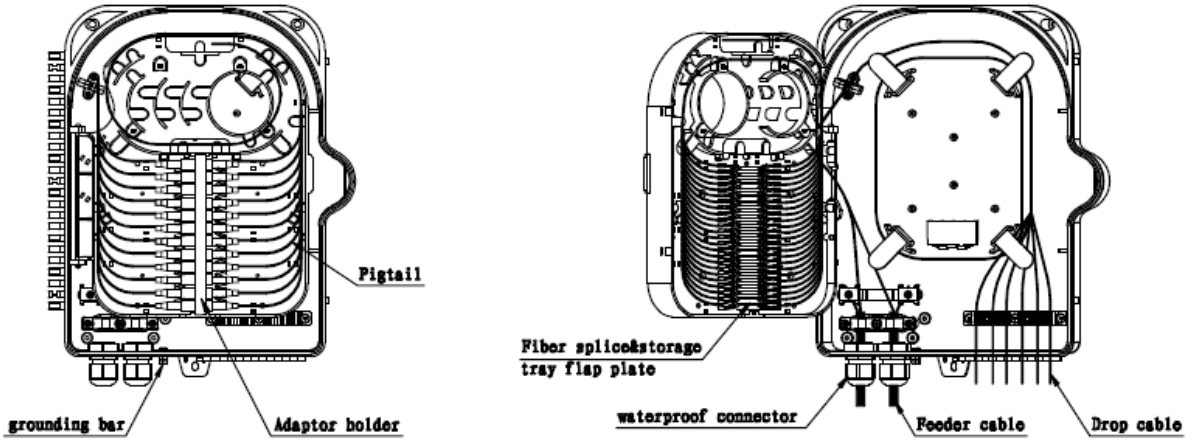

operate picture A

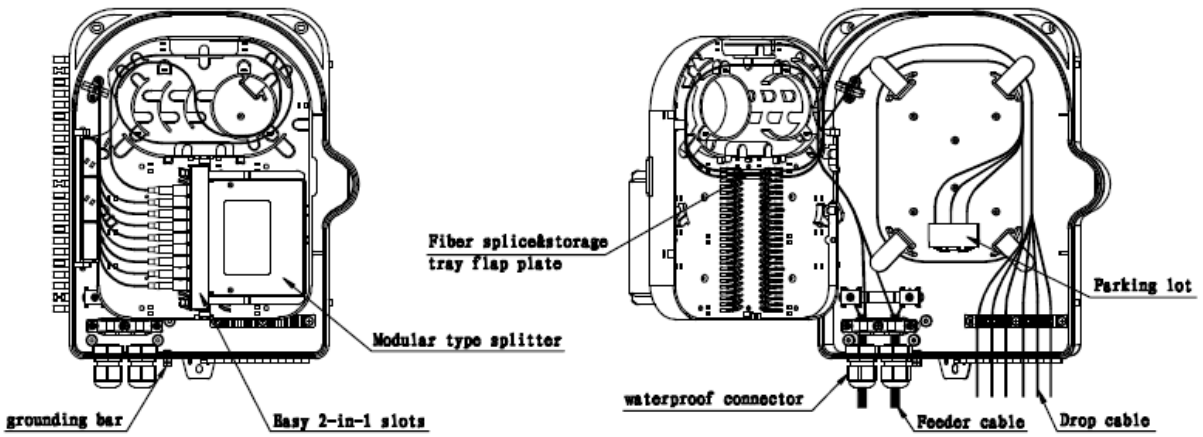

operate picture B